




DICKEY-john[®]
CORPORATION

GAC2100 GI

Grain Analysis Computer

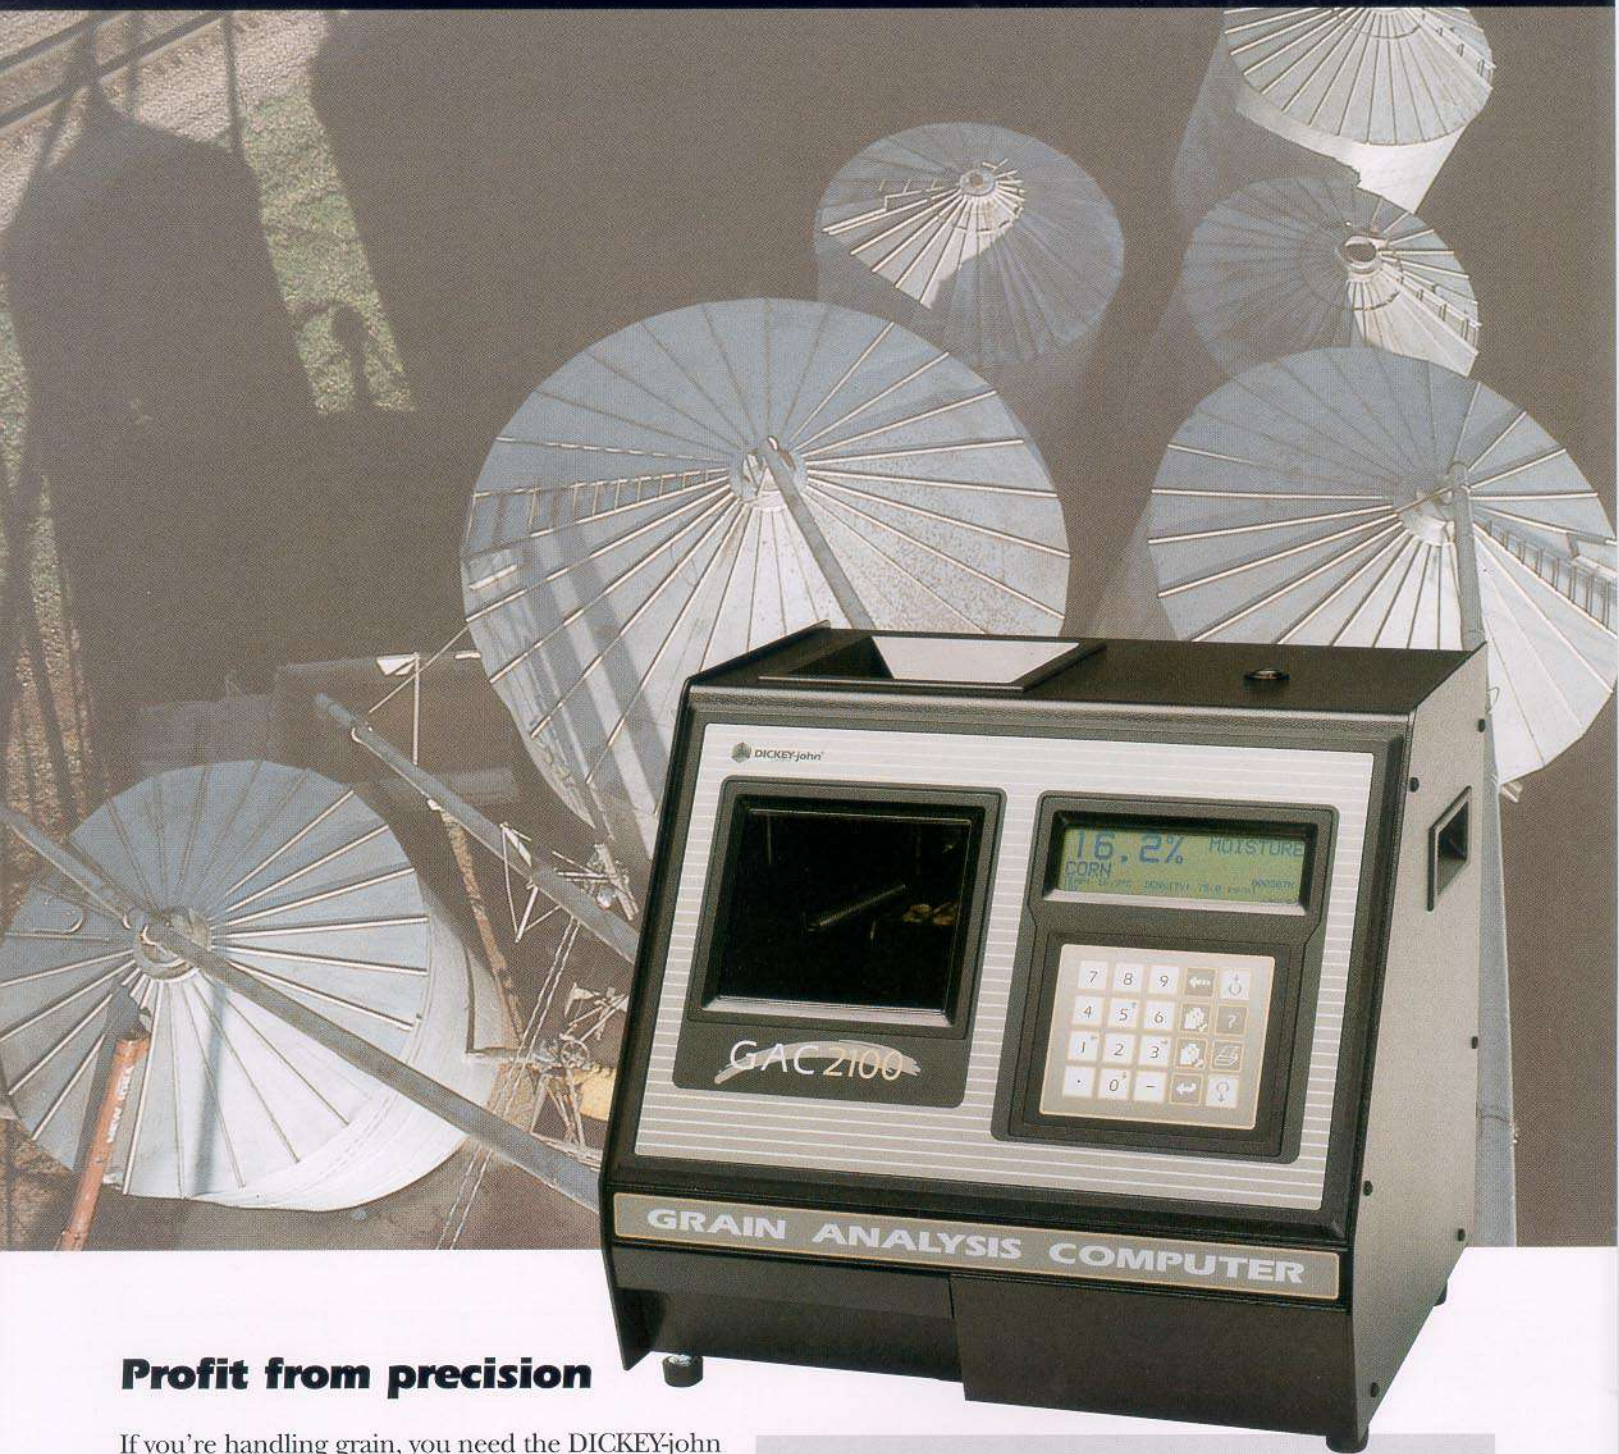

Profit from precision

If you're handling grain, you need the DICKEY-john GAC2100 GI. The GAC2100 GI is an economical, non-NTEP version of DICKEY-john's popular GAC2100 NB, which is used for official moisture measurement by USDA/FGIS, licensed FGIS agencies and most grain terminals and country elevators in the US. THE GAC2100 GI is as accurate as the GAC2100 NB, it can store up to 16 grain calibrations, and it delivers the widest grain and unit operating temperature ranges available in commercial moisture meters.

The GAC2100 GI is fully automatic for these tasks:

- sample weight
- temperature compensation
- moisture correction


The GAC2100 GI can handle 16 different grains, including:

- edible beans
- cereals
- grass seeds
- oilseeds
- vegetable seeds

Operating the GAC2100 GI is a simple matter of **Selecting** the desired product to test, **Pouring** the sample into the test hopper, **Testing** the sample, and **Displaying** the results. An easy-to-read LCD displays one-button prompts to quickly and easily step the user through the entire procedure, which takes just a few seconds start to finish. Two separate RS232 ports allow test results, by sample number, to be logged to a host computer and for sample tickets to be printed. The GAC2100 GI may be programmed to test sixteen different grains, and it may be operated in eight different languages.



Select Sample



Pour Sample



Test Sample



Display Results

Specifications

Performance

Measurement Method:	Capacitance, conductance, weighing device
Applications:	Cereals, oilseeds, grass seeds, vegetable seeds, edible beans
Measured Parameters:	Moisture, temperature and specific weight
Measurement Time:	16 seconds
Moisture Range:	5 to 45% (depending on grain calibrations)
Grain Temperature:	0 to 50°C (32 to 122°F)
Temperature Difference:	20°C instrument to grain sample
Temp. Compensation:	Yes, automatic
Moisture Repeatability:	± 0.1% (depending on application)
Moisture Resolution:	0.1% moisture
Grain Sample:	Whole grain, pellets
Sample Size:	250 gr (approx. for cereal grains)

Features

Number of Calibrations:	16 reprogrammable calibrations
Languages:	8 languages, operator selectable
Display:	Large LCD display 240 x 64 pixels
Output:	2 standard RS232 printer ports

Installation Requirements

Operating Temperature:	5 to 45°C (41 to 113°F)
Humidity:	5 to 95% non-condensing
Power Supply:	85-264 VAC, 48-62 Hz at 20 VA consumption
Dimensions:	(H x W x D) 37,5 x 38,7 x 40,6 cm (14.75" x 15.25" x 16")
Weight:	11,8 kg (26 lbs)
Shipping Dimensions:	(H x W x D) 48,3 x 56,0 x 58,5 cm (19" x 22" x 23")
Shipping Weight:	16,0 kg (35.5 lbs)



DICKEY-john[®]
CORPORATION

5200 Dickey-john Road ▪ Auburn, IL 62615 ▪ Telephone 800-637-2952 ▪ Fax 217-438-6012
www.dickey-john.com ▪ email sales@dickey-john.com ▪ ©2003 DICKEY-john Corporation ▪ All rights reserved.